


Crane Jib darugém

Gyártó, típus: Crane Jib darugém

Referencia szám: M0025

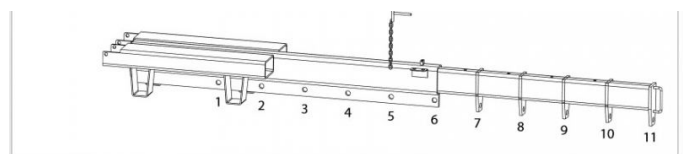

| Position of the safety lifting hook | | | | | | | | | | | | | | Max arm length | Max fork spread measured over forks | Fits on max fork section | Weight |
|-------------------------------------|-----------------------------|-----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------|-----|----------------------|--|-----------------------------------|--------|
| REF | Load centre 500 mm | Load centre 750 mm | Load centre 1000 mm | Load centre 1250 mm | Load centre 1500 mm | Load centre 1750 mm | Load centre 2000 mm | Load centre 2250 mm | Load centre 2500 mm | Load centre 2750 mm | Load centre 3000 mm | mm | mm | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | | | | | | |
| | kg | kg | kg | kg | kg | kg | kg | kg | kg | kg | kg | mm | mm | mm | kg | | |
| | 4000 | 3800 | 3200 | 2500 | 1900 | 1100 | 975 | 850 | 650 | 500 | 400 | 3000 | 450 | 150 x 65 | 156 | | |



- The fork-mounted crane jib has 2 adjustable swivelling lifting safety hooks.
- The lifting hooks can be adjusted every 250 mm (11 different positions).
- The crane jib is safely secured behind the fork heels with locking pins.
- The fixed crane arm has a length of 2000 mm with a total telescopic length of 3000 mm.
- Please keep the capacity of the lift truck in mind.
- Fully tested and CE-certified.
- Painted orange.